
STANLEYEngineered Fastening

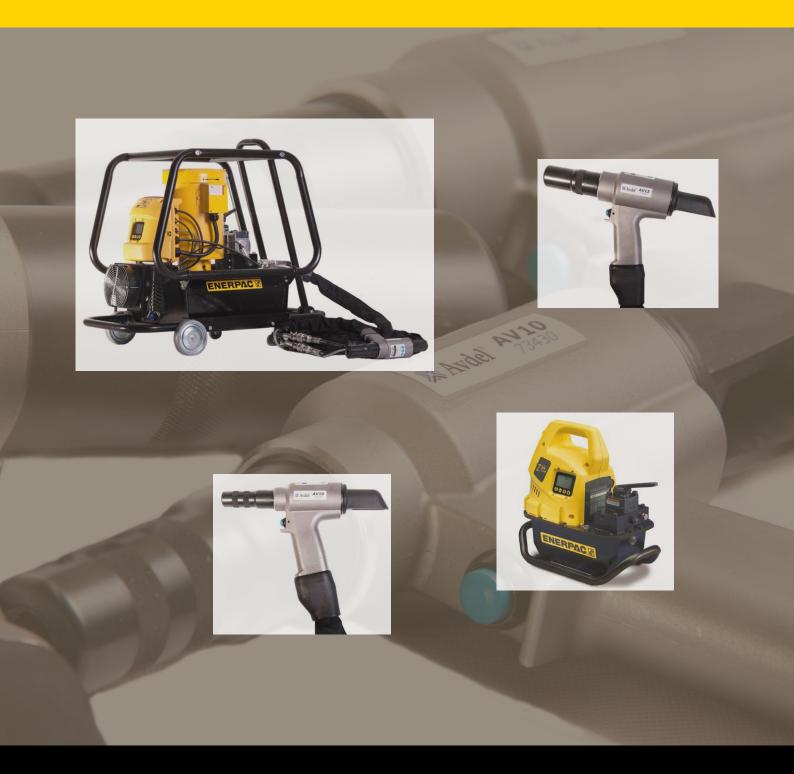

734 AVTM Series
Lockbolt Installation Systems

POP[®] Avdel[®]

New Range of Installation Tools for Lockbolt Systems

POP Avdel lockbolt systems are designed for high strength, secure assembly. Quick and simple to place, durable and long lasting, they are the ideal solution where spot welding is not practical and other methods are costly, time consuming or not possible.

We have designed a new range of installation tools, especially suited for high speed installation of larger diameter lockbolts.

To determine the most suitable tool according to fastener size and application requirements, four parts have to be selected:

- 1. Hand tool
- 2. Nose equipment
- 3. Pump unit
- 4. Hydraulic hose

Placing Tools and Nose Equipment

Features

- Robust and highly durable installation tools
- High performance hydraulic seal & wiper technology
- Piston bearing rings
- Ergonomic and compact design
- High-speed operation

Benefits

- Long working life in extreme conditions
- Increased seal & component life
- Low maintenance
- Optimised operator comfort
- Manoeuvrable in limited access applications
- High speed installation of fasteners



AV™ Series Tools

Different AV hand tools suit the fastener size ranges and there is one nose equipment for each fastener size. Please select the model according to the diameter of the respective lockbolt.



| Model Part Number | | | AV 15 73432-02000 | AV 30 73434-02000 | AV 50 73435-02000 | | |
|---|---|------------------|--|---------------------------|---------------------------|--|--|
| Pull force | | 55 kN | 80 kN | 175 kN | 340 kN | | |
| Stroke | | 25 mm | 32 mm | 41 mm | 55 mm | | |
| Weight without nose equipment with nose equipment | | 3.5 kg 3.9 kg | 4.5 kg 5.4 kg | 6.8 kg 8.75 kg | 13.5 kg 17.9 kg | | |
| Dimensions mm | | 117 | 134.5 | 166.5 | 192 | | |
| øC - I | E A B E | 79 | 87 | - | - | | |
| | | C 56 | 66 66 92 | | 125 | | |
| P | 100 | 236 | 246 | 246 270 | | | |
| | | 89 - 95 | 108 | 113 - 134 | 148 - 152 | | |
| Nose Equipmen | nt for Fastener-ø | | Part Number for above model | | | | |
| NeoBolt® | 12.7 mm (¹ / ₂ ") | - | 73432-03300 | - | - | | |
| | 16.0 mm (⁵ / ₈ ") | - | - | 73434-03200 | - | | |
| | 19.1 mm (³ / ₄ ") | - | - 73434-03300 | | - | | |
| | 25.4 mm (1") | - | - | - | 73435-03200 | | |
| Avdelok® | 9.6 mm (³ / ₈ ") | 73430-03100¹) | - | - | - | | |
| Avdelok® XT | 12.7 mm (¹ / ₂ ") | - | 73432-03200 ¹⁾ 73433-03200 ²⁾ | 73412-03100 ²⁾ | - | | |
| | 15.9 mm (⁵ / ₈ ") | - | - | 73412-03200 ²⁾ | - | | |
| | 19.1 mm (³ / ₄ ") | - | - | 73412-03300 ²⁾ | - | | |
| | 22.2 mm (⁷ / ₈ ") | - | - | - | 73410-03200 ²⁾ | | |
| | 25.4 mm (1") | - | - | - | 73410-03100 ²⁾ | | |
| | 28.6 mm (1 ¹ / ₈ ") | - | - | - | 73410-03300 ²⁾ | | |
| Avbolt® | 8.0 mm (⁵ / ₁₆ ") | 73430-03300¹) | - | - | - | | |
| | 10.0 mm (³ / ₈ ") | 73430-032001) | - | | | | |
| | 12.7 mm (¹ / ₂ ") | - | 73432-03100 ¹⁾ 73433-03100 ²⁾ | 73412-03600 ²⁾ | - | | |
| | 16.0 mm (⁵ / ₈ ") | - | - | 73412-03400 ²⁾ | - | | |
| Avseal® II | 16.0 mm 16.0 mm flange | 73430-05000¹) | - | - | - | | |
| | 18.0 mm | 73430-05200¹) | - | - | - | | |

¹⁾ without jaw release 2) with jaw release

All AV series tools work with all models of Enerpac PRO Series Pump Units.

Enerpac® PRO Series - Pump Units

STANLEY Engineered Fastening has partnered with Enerpac, the World Leader in Hydraulic Equipment to offer a specialised selection of reliable, durable and versatile high-pressure hydraulic pumps to power all AVTM Hydro-Electric Power Tools.

Features and Benefits

- High-efficiency hydraulic pump design; higher oil flow and bypass pressure, cooler running and requires 18% less current draw than comparable pumps
- Powerful electric motor provides high powerto-weight ratio and excellent low-voltage operating characteristics
- High-strength, molded composite shroud protects electric pump motor and electronics, while providing an ergonomic, non-conductive handles for easy portability

- Full sight oil level glass & durable steel reservoir
- All pump configurations able to power all AV series tools
- Accessories kit for heat exchanger and roll cage available







Reservoir heat exchanger



Full sight oil level glass

Specifications

To help you find the suitable pump unit according to your requirements and working environment, please use the selection guide below:

| Model Part Number | PRO220E 76507- 02000 | PRO220 76502- 02000 | PRO220D 76502- 02300 | PRO240 76503- 02000 | PRO240D 76503- 02300 | PRO415 76504- 02000 | PRO415D 76504- 02300 |
|--|----------------------------|---------------------------|----------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| Tool Cycle Time* - High - Medium - Low | Low - Med. | Med High | Med High | Med High | Med High | Med High | Med High |
| Production Level - High volume - Medium volume - Small batch | Small - Med. | Med High | Med High | Med High | Med High | Med High | Med High |
| Portability - High - Medium | High | Medium | Medium | Medium | Medium | Medium | Medium |

^{*} Tool cycle time is dependent on fastener placing size and hydraulic hose length

Note: Pump Specifications as noted provide guidance on capability. STANLEY Engineered Fastening offers many options and system configurations beyond the standard offering as noted, including larger tank reservoirs, heat exchangers, 3 Phase Motor options, etc. Please call our Technical Applications team to discuss specific needs and recommendations.

Technical Data

| Model Part Number | | PRO220E 76507- 02000 | PRO220 76502- 02000 | PRO220D 76502- 02300 | PRO240 76503- 02000 | PRO240D 76503- 02300 | PRO415 76504- 02000 | PRO415D 76504- 02300 |
|--------------------------------------|---------|----------------------------|---------------------------|----------------------------|---------------------------|----------------------------|---------------------------|----------------------------|
| Motor Size | kW | 1.25 | 1.12 | 1.12 | 1.12 | 1.12 | 1.12 | 1.12 |
| Motor type | | Universal | Induction | Induction | Induction | Induction | Induction | Induction |
| Reservoir | litres | 8 | 10 | 10 | 10 | 10 | 10 | 10 |
| Output flow rate (I/min) | 7 bar | 11.5 | 8.9 | 8.9 | 8.9 | 8.9 | 8.9 | 8.9 |
| | 50 bar | 8.8 | 8.2 | 8.2 | 8.2 | 8.2 | 8.2 | 8.2 |
| | 350 bar | 1.2 | 0.84 | 0.84 | 0.84 | 0.84 | 0.84 | 0.84 |
| | 700 bar | 1.0 | 0.82 | 0.82 | 0.82 | 0.82 | 0.82 | 0.82 |
| Max. Operating Pressure | bar | 700 | 700 | 700 | 700 | 700 | 700 | 700 |
| Motor Electrical Specification | Volts | 208 - 220 | 208 - 240 | 208 - 240 | 208 - 240 | 208 - 240 | 380 - 415 | 380 - 415 |
| | Phase | 1 | 1 | 1 | 3 | 3 | 3 | 3 |
| | Hz | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Sound | dB(A) | 85 - 90 | 75 | 75 | 75 | 75 | 75 | 75 |
| Weight | kg | 32 | 55 | 60 | 55 | 60 | 55 | 60 |
| Dimensions (cm) | L | 46 | 49 | 64 | 49 | 64 | 49 | 64 |
| | W | 24 | 27 | 36 | 27 | 36 | 27 | 36 |
| | Н | 43 | 60 | 64 | 60 | 64 | 60 | 64 |
| Digital LCD Display | | No | Yes | Yes | Yes | Yes | Yes | Yes |
| Roll Cage & Heat Exchanger | | No | No | Yes | No | Yes | No | Yes |

Specifications

Hydraulic Hose Assemblies

There are different hose lengths available. Please select the length according to application:

| Hose Assembly Length | Part Number |
|----------------------|-------------|
| 5 metre | 07008-00448 |
| 10 metre | 07008-00449 |
| 15 metre | 07008-00450 |



Oil

Pump units are already supplied filled and primed with hydraulic oil. For future maintenance you can order the following:

| Hydraulic Oil Volume | Part Number |
|----------------------|-------------|
| 1 litre | 07992-00081 |
| 5 litres | 07992-00082 |
| 20 litres | 07992-00083 |



Powerful Brands. Breakthrough Solutions.

At STANLEY Engineered Fastening we believe in seeking ways to serve our customers better. We create the future by anticipating our customers needs. Through diversifying our product lines, creating unique assembly technologies and offering a breadth of service to meet the demands of industry worldwide, STANLEY Engineered Fastening provides technological solutions to over 100 different industries.



Avdel®

Avdel has been producing assembly systems since 1936 and offers a comprehensive range of fasteners and tooling.



POP®

From 2mm micro rivets to 1/4"structural rivets, POP blind rivets meet the needs of multiple markets.



Dodge®

With a focus on high-quality threaded inserts for plastics products, Dodge has been a leader in the fastening market since the 1950s.



Spiralock®

Spiralock is a technologically superior fastening system ideally suited for threaded joint applications subjected to heavy shock and vibration.



Gripco®

Gripco has been providing quality nut and threaded assembled products since 1904.



STANLEY Assembly Technologies

STANLEY Assembly Technologies supplies production solutions to the global assembly market.



Heli-Coil®

Based on a long history that began in the aerospace industry, Heli-Coil offers a vast range of high-quality thread inserts.



Tucker®

A one-sided drawn-arc welding process is the foundation of the Tucker No-Hole assembly solution.



iForm®


iForm continues a proud heritage since 1969 and represents over 40 years of creative threaded fastener application engineering.



Warren[®]

Whether it's plastic, metal, or a combination of the two, Warren can design a product that will suit your environment.



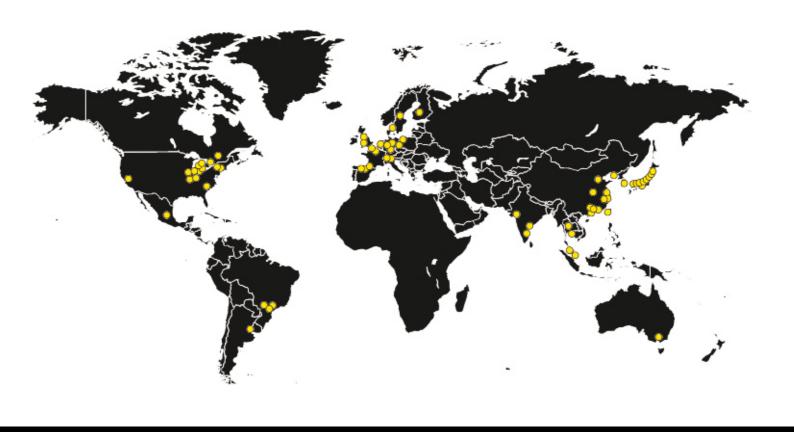

STANLEY Engineered Fastening, a Stanley Black & Decker Inc. Company has been revolutionizing fastening and assembly technologies for a variety of industries for more than 40 years.

For more information, please visit our website

www. Stanley Engineered Fastening. com

Quick Links:

- ➤ Our locations http://www.stanleyengineeredfastening.com/contact/global-locations
- ▶ Request Information http://www.stanleyengineeredfastening.com/econtact/request-information
- ▶ Resource Center http://www.stanleyengineeredfastening.com/resource-center

Avdel UK Limited Stanley House, Works Road Letchworth Garden City, Hertfordshire SG6 1JY Tel. +44 (0)1582 900-000 · Fax -001 enquiries2@sbdinc.com

© 2013 Stanley Black & Decker, Inc., Rev. 03a.2015